

LEGEND -FLOORING FINISHES

TILE

DEMO: 1. TILE CONTRACTOR IS RESPONSIBLE FOR THE DEMO OF ANY EXISTING TILE OR OLD CARPET WHERE NEW TILE IS INDICATED. 2. DEMO OF THE CARPET WHERE NEW CARPET IS INDICATED WILL BE REMOVED BY THE NEW CARPET CONTRACTOR (NOT IN THIS CONTRACT). 3. "FEATHER UP" SUB FLOOR ANYWHERE CARPET MEETS NEW TILE USING VINYL LEVELING MATERIAL INDICATED IN SPECIFICATION BOOKLET (NO REDUCER STRIPS BETWEEN THE 2 MATERIALS!).

TILE 1: VS77 14X28 ONE COLOR SEE SPEC.

TILE 2: VS88 14X14 ONE COLOR SEE SPEC.

TILE 3 - BASE: VS77 7X14 TILE BASE, ONE COLOR SEE 02/1.1.01 & SPEC.

TILE 4 : AV111/AV112 18X18 ONE COLOR SEE SPEC.

TILE 5 - BASE : 18X18 ONE COLOR (SAME AS TILE#4) CUT INTO 9X18 BASE WHERE TILE #4 IS SPEC.

NOTE: IN AREAS RECEIVING TILES #1 & #2 USE 7X14 TILE BASE(TILE 3), SEE SPEC.; IN AREAS RECEIVING TILE #4 , USE TILE 5 FOR BASE, SEE SPEC.

TILE 6 - WAINSCOTT: VS77 14X28 TILES, ONE COLOR, 3 TILES HIGH (42") SEE 02/1.1.01 FOR CAP DETAIL & SPEC.

TILE 7 - LEVEL II RESTAURANT, SEE 1.1.07

EXISTING TILE : TO REMAIN, NOT INCLUDED IN THIS CONTRACT (N.I.C.).

NO WORK

TERRAZZO INSERTS INCLUDED IN THIS CONTRACT

TERRAZZO FLOORING BY OTHERS

CARPETS:

ALL NEW CARPETS BY OTHERS (SOME REMOVAL OF OLD, IN NEW TILE AREAS BY THE CONTRACTOR)

CARPET 1 : WOVEN BROADLOOM; 6'-0" X 6'-0" REPEAT 12'-0" MATERIAL (BY OTHERS)

CARPET 2 : WOVEN BROADLOOM; NO REPEAT 12'-0" MATERIAL. ACCENT CARPET INLAYS TO BE PRE DRAWN IN THE FIELD AND APPROVED BY PIE INTERIOR DESIGNER. (BY OTHERS)

CARPET 3: TUFTED BROADLOOM; (BEHIND NOTED COUNTERS), (BY OTHERS)


CARPET 4 WALK-OFF AREAS: LEE'S "STEP-UP ", 6'-0" WIDE ROLL MATERIAL, 5/32", 380Z., # DD769, COLOR 508 BLACK (BY OTHERS)

CARPET 5 WALK-OFF AREAS: USING EXISTING PAWLING PRO-TEK ALUMINUM TREADS. REPLACE EXISTING BLUE CARPET INSERTS W/ PRO-TEK COLOR: BLACK; HEAVY DUTY CARPET STRIPS, REPAIR OR REPLACE ALUMINUM FRAMES AND/OR DAMAGED TREADS AS NEEDED (REPLACE ANY BENT OR DAMAGED TREAD OR FRAME)" (BY OTHERS)


VINYL COMPOSITE TILE (VCT): GENERAL CONTRACTOR TO PROVIDE VCT IN IT'S ENTIRETY. AREAS RECEIVING VCT SHALL RECEIVE VINYL COVE BASE. (BY OTHERS)

EXISTING PRESSURE MATS @ GLASS DOOR ENTRIES TO REMAIN W/ TILE AROUND THEM, LOCATIONS OF THESE WILL BE REVIEWED DURING THE MANDATORY PRE-BID CONFERENCE.

NOTE: TILE CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF A CONTINUOUS TILE & GROUT PATTERN AT LINE OF TRANSITION AT ALL DOORS TO PERIMETER WALK WAY. I.E. CL 100 , TB 100 ETC.

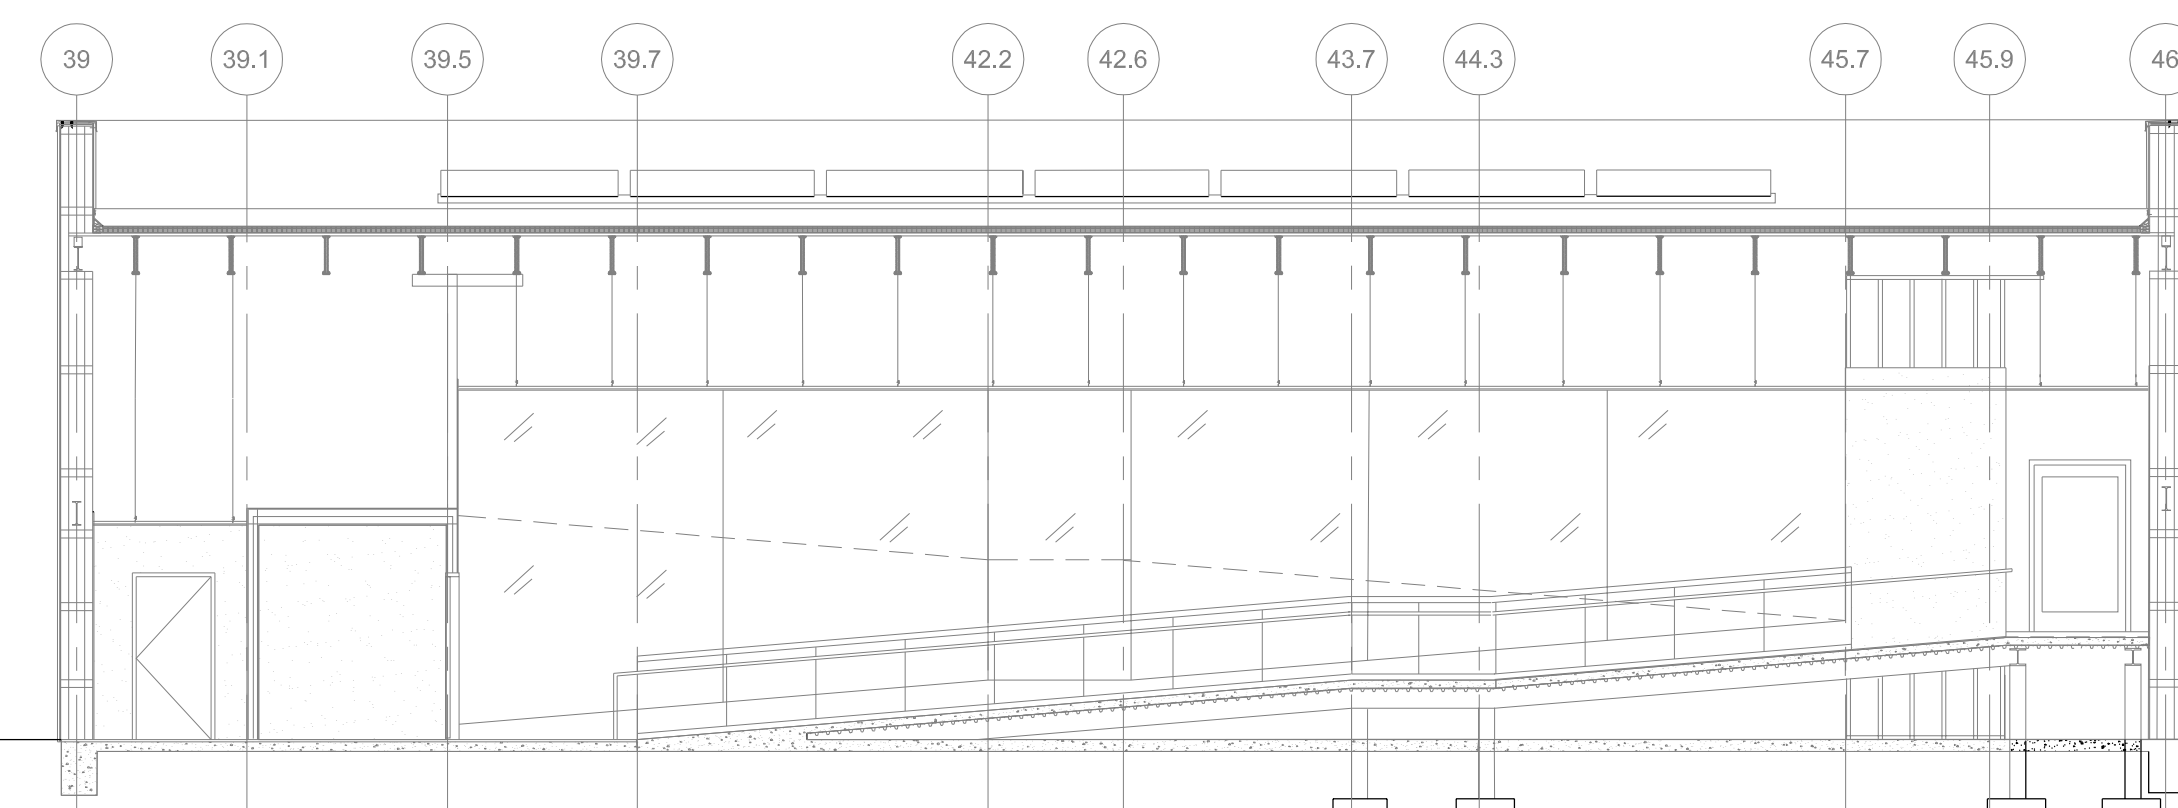


2 CROSSSECTION GATES 2-6 RAMP SCALE: 1/8" = 1'-0"

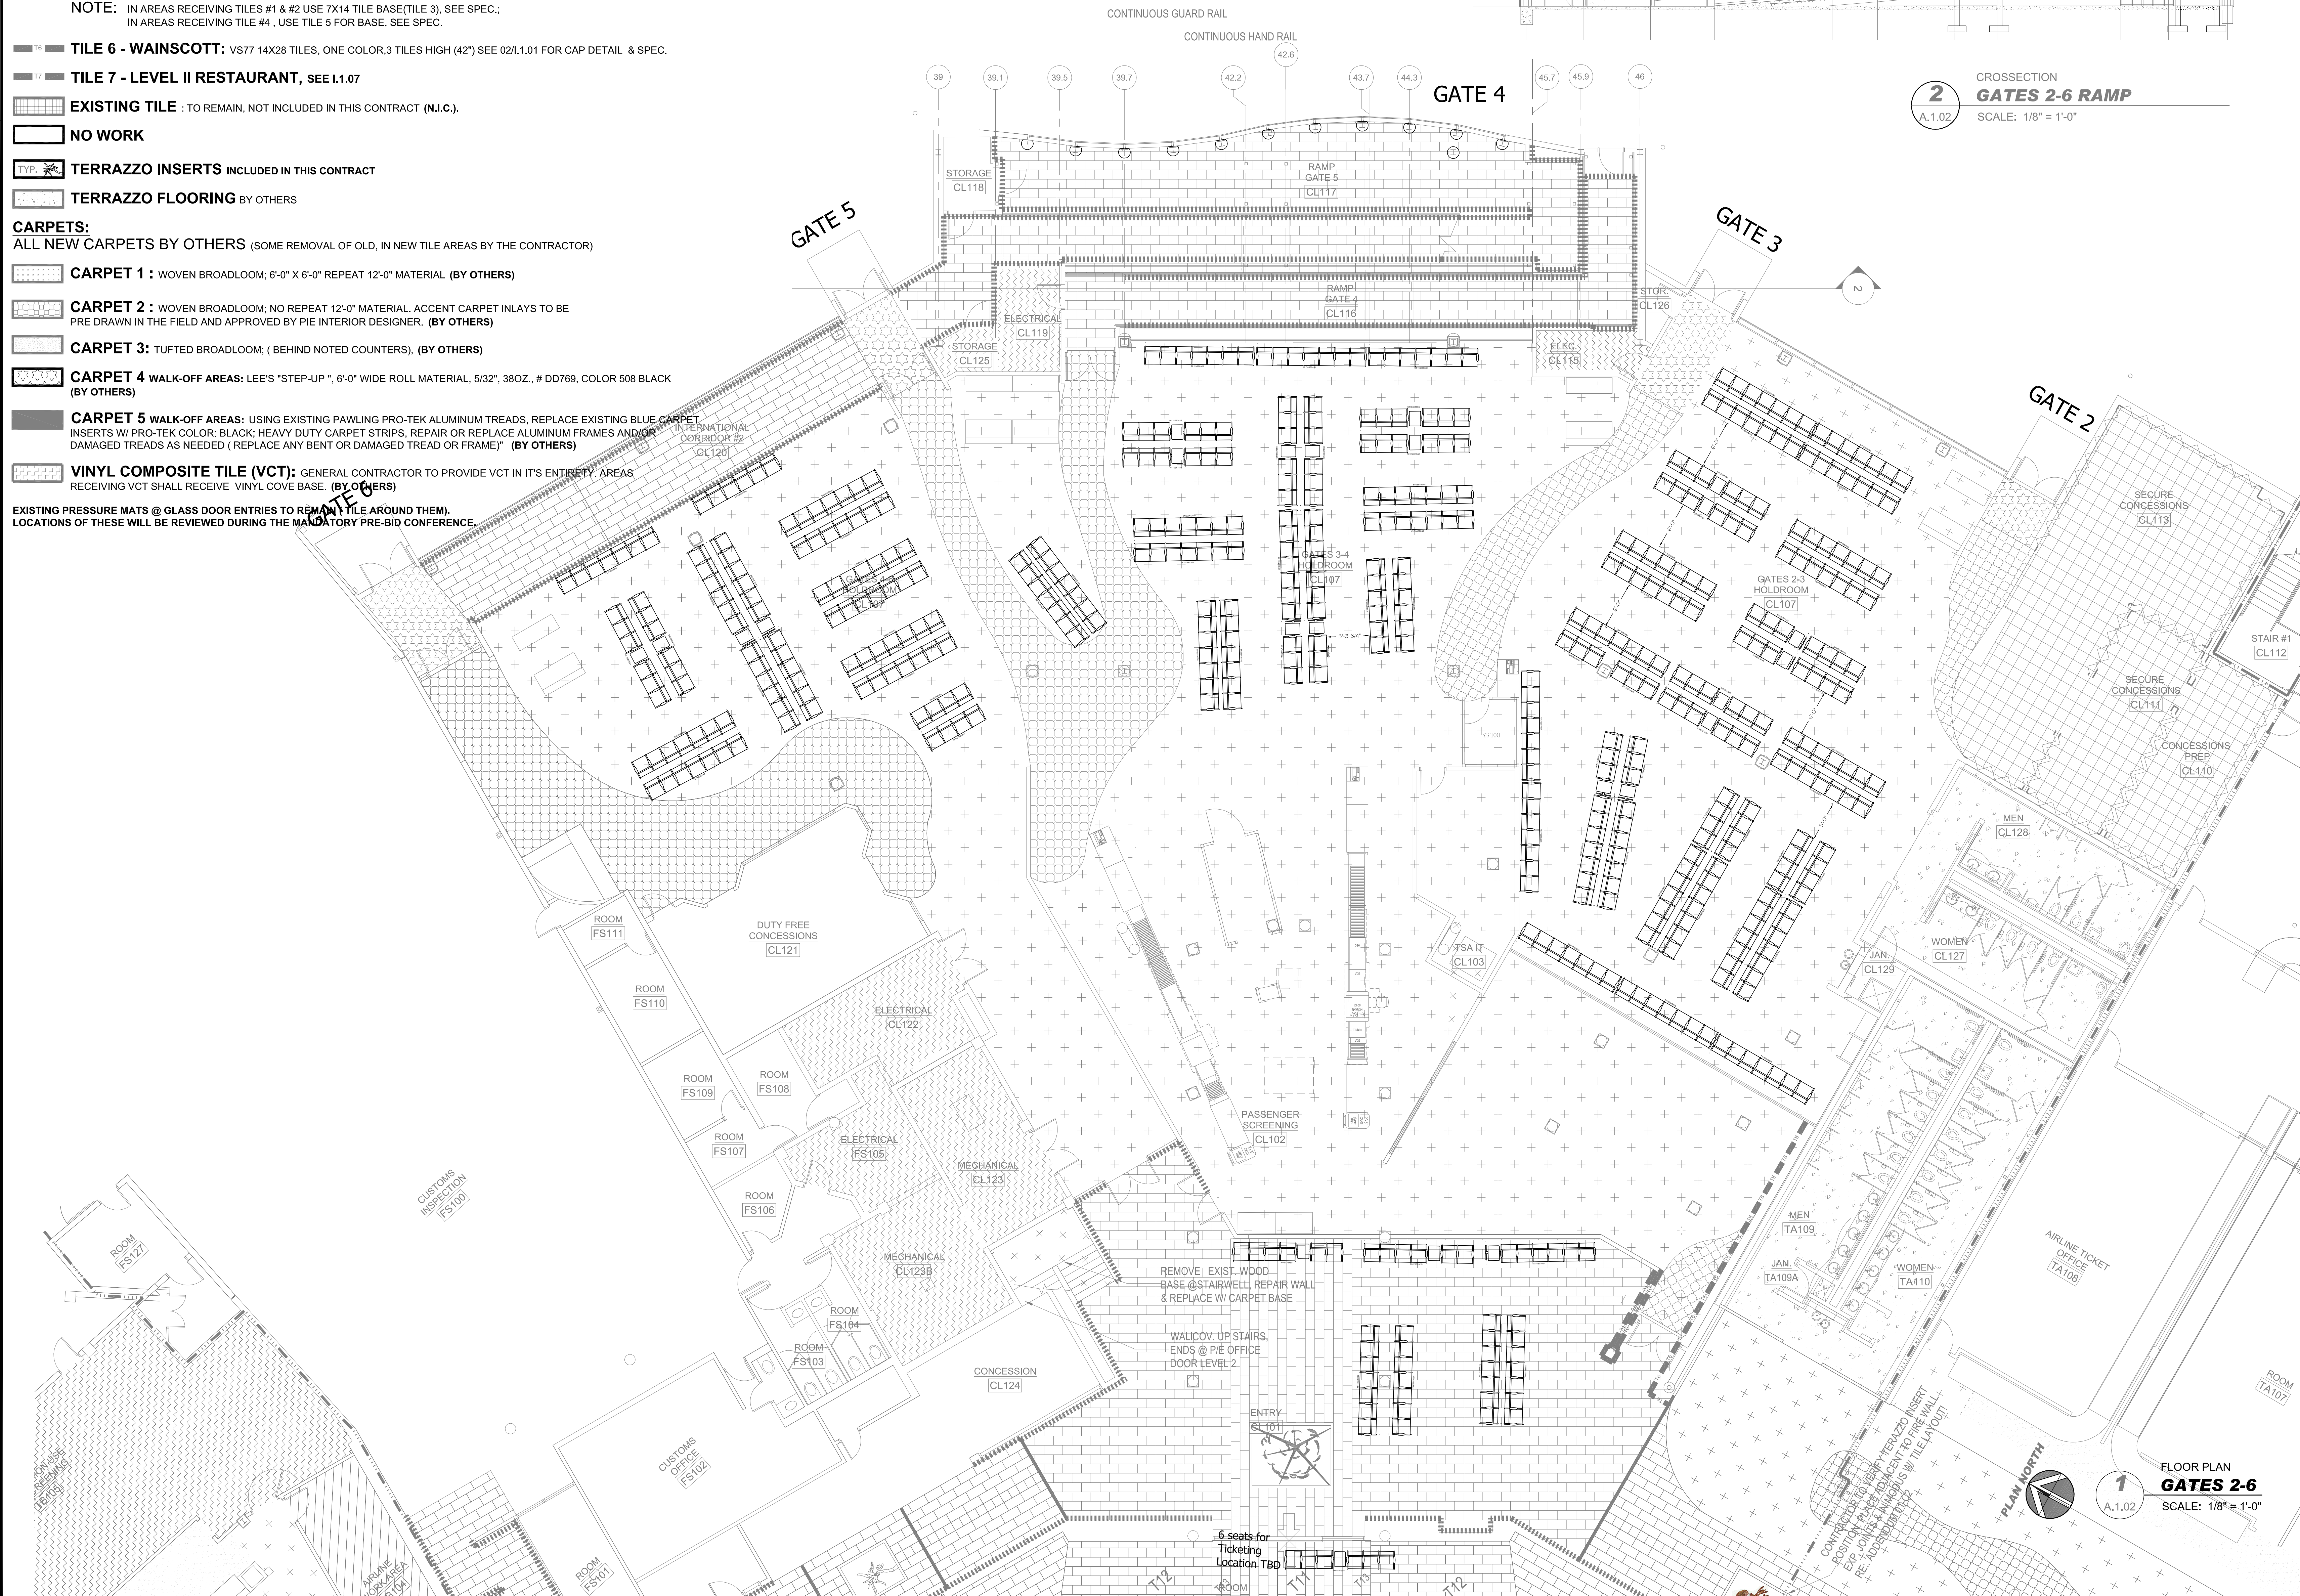

ST PETE CLEARWATER AIRPORT INTERIOR TILE PROJECT

KEY PLAN

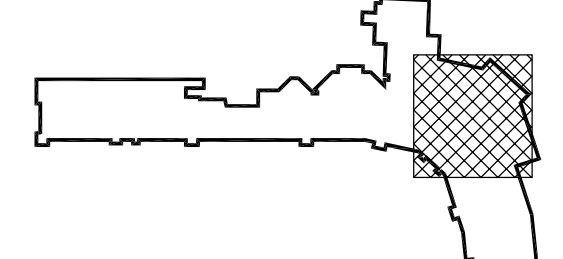

REVISIONS

Table with columns: No., Description, Date, By. Contains one revision entry.

INTERIOR TILE PROJECT (IN ADDITION TO CORRIDOR TILE PROJECT)

SEATING LAYOUT GATES 2-6

LPA Project Number: AR178005.8 Date: 04.30.2009

I.1.02

Plotted by: D:\e22\loc on 8/27/2009 9:41:01 AM